



Setting a custom paper size for the OKI B432

ClearAccess

1. Log in to the ClearAccess station as the Windows administrative user.
2. Click the Windows Start button and type “printers.”
3. In the search results, click “Printers & scanners.” The Settings > Printers & scanners window opens.
4. Click on the OKI B432 option and click the manage button. The Manage your device window opens.
5. Select **Printing preferences** to open the OKI driver settings.

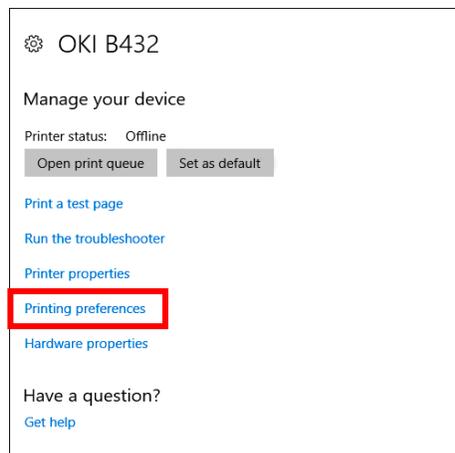

6. Click Paper Feed Options followed by the Custom Size button to open the Custom Size dialog.

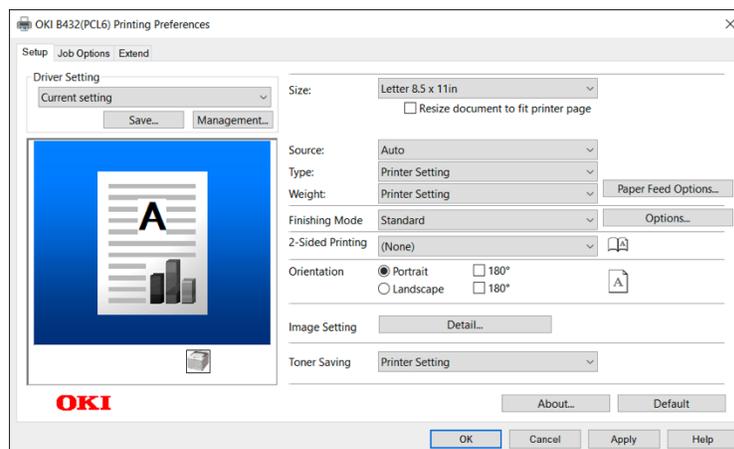




7. On the Custom Size dialog do the following.
 - a. Enter a name.
 - b. Set the Unit as inch.
 - c. Specify the length
 - d. Keep the Width as 8.50 inches.

Note:

Clear Access does not support any widths other than 8.50.

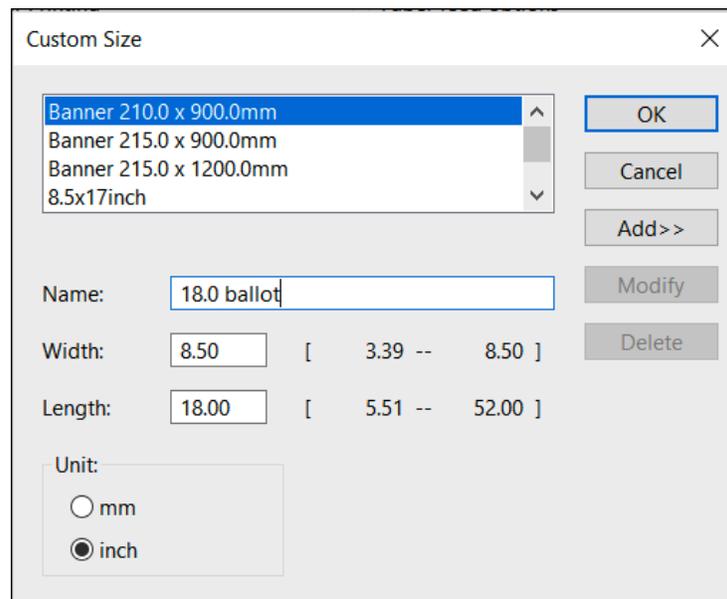

8. Click **Add>>** to add your custom size.
9. Click **OK** to close the Custom Size Dialog.
10. Click **OK** to close the Paper Feed Options window.
11. Select the newly created size in the Size drop-down menu then click **Apply**.
12. Click **OK** to close the driver settings window.